



MaxFlo XL™ VSTD

EXPERT LINE



YEARS OF WARRANTY




Totally Hayward®

EXCELLENT VALUE FOR MONEY

- **1 HP and 1.5 HP available**
- Smart Inverter + Permanent Magnet Motor + synchronized motor : electricity saving up to 85%*
- **Extremely quiet**
- **Remote control**, even through the smartphone, by connecting it to AquaRite® +
- **180° rotary box for convenient access** to the user interface
- **Twist-Lock opening cover** for easy maintenance
- **Union fittings provided**
- Recommended for pools **up to 65 m³****

* Running at low speed.
Electricity savings of 65% are generally achieved.
** Running at low speed 24 hours

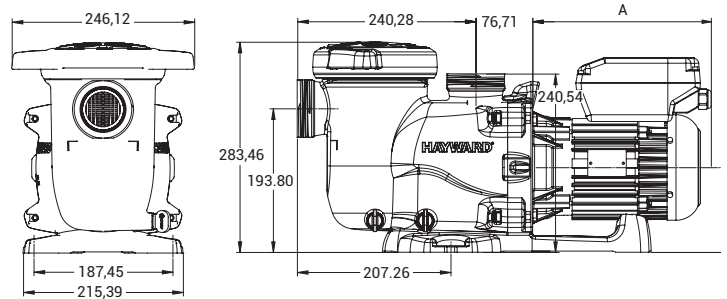


The intuitive control module displays relevant information such as real-time energy consumption. Improved control box, with the addition of five daily programs. "Skimming" function that allows the surface to be automatically skimmed every 1, 2 or 3 hours. **Timer Mode.**

Technical Specifications

Max. water temp.	35°C
Mechanical seal	AISI 304, suitable for salt water
Motor-drive specifications	Class F, IP55, 50 Hz, Brushless VFD
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC


• 1 HP Model Curve

Pressure (mbar)

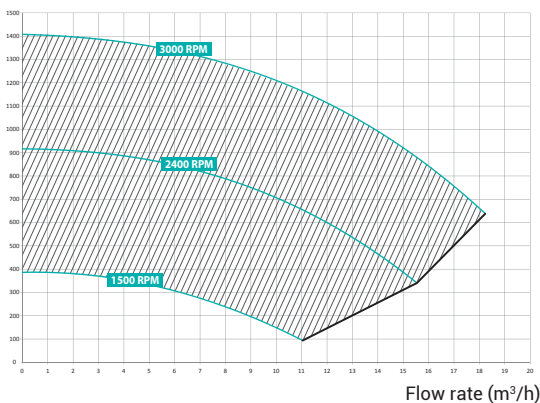

• 1.5 HP Model Curve

Pressure (mbar)

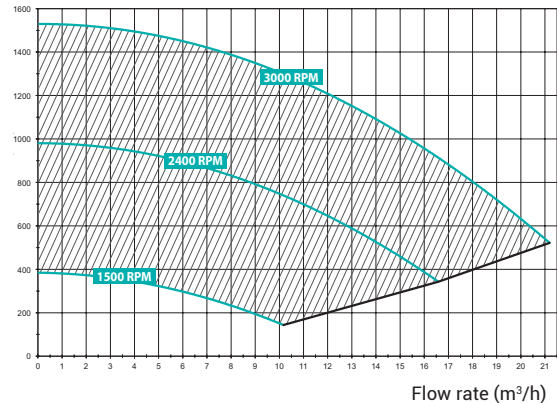

	Speed	Type	Dim. A	I/O	Flow rate*	Input Power P1	Output Power P2	Amperage*	Item
MAXFLO XL™ VSTD	600 - 3000 RPM (20 rpm)	1 HP	241 mm	50 mm	@10 m: 13.8 m ³ /h @8 m: 16.5 m ³ /h	950 W	750 W	4.4 A	SP2310VSTD
	600 - 3000 RPM (20 rpm)	1.5 HP	265 mm	50/63 mm	@10 m: 15.3 m ³ /h @8 m: 18 m ³ /h	1240 W	1 100 W	5.9 A	SP2315VSTD

* at 3000 Rpm